SCREED TRIPODS

TECHNICAL SPECIFICATIONS

High quality screed tripods for levelling liquid screed and self-compacting concrete.

BENEFITS

- **Available in Stainless Steel or Zinc Plated Mild Steel**
- **Height adjustment for material depths of between 10mm & 150mm**
- **Fully welded 60mm levelling disc**
- **Oversized legs for stability**
- **Elongated nut and M12 threaded shaft**

HOW IT WORKS

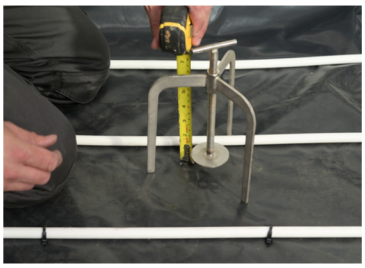

1. Place a screed tripod next to the datum level and set the disc height to match it. Leave in place.

2. Place additional screed tripods throughout the area to be screeded.

3. Set a laser level to the datum screedpod's disc.

4. Adjust the height of each tripod's disc until they are all set at the datum level.

TECHNICAL DATA

SKU	SPD004	SPD006
Weight	710g each	727g each
Dimensions	L210mm, W160mm, H150mm each	L210mm, W160mm, H150mm each
Material	Stainless Steel	Zinc Plated Mild Steel
Corrosion resistant?	Yes	No
Applications	Liquid Screed	Liquid Screed
Box Qty	20	20
Pallet Qty	n/a	n/a

IMPORTANT INFORMATION:

- Recommended spacing 1500mm between screed tripods, although this can be adjusted to suit.
- Always set the level directly to each disc.

Clean each tripod immediately after use, especially the thread, to prevent screed hardening

Lubricate threads periodically to prolong life