BUFFALO NRVs

TECHNICAL SPECIFICATIONS

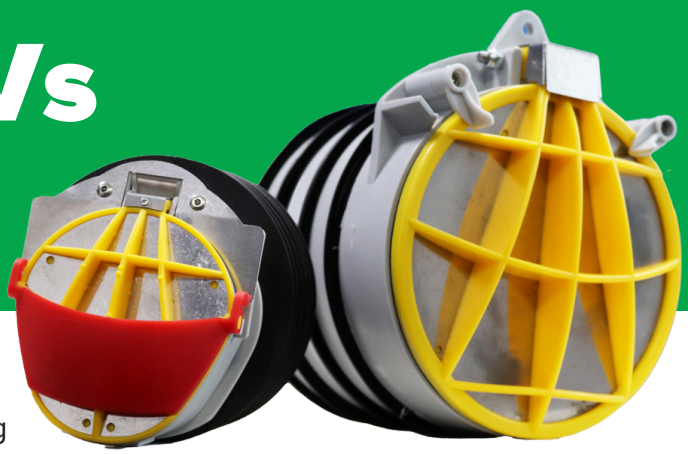

Easy to install retro-fit, non-return valve to prevent wastewater from flowing back into your property during heavy rainfall or flooding.

BENEFITS

- **Simple and effective way to protect your home from foul water backflow and unpleasant drain smells**
- **Easy push fit installation in the inlet of a drainage chamber**
- **Available in 110mm and 150mm sizes (4" and 6")**
- **Suitable for clay, PVC & cast iron pipe systems**
- **Stainless steel reinforced door**
- **Lockable flap for easy maintenance**

HOW IT WORKS

Push fit into the mouth of the inlet pipe. Make sure the flap is facing down, unlocked, and that the hinge is horizontal. Flush a toilet to test flow.

TECHNICAL DATA

SKU	NRV110	NRV150
Weight	195g	443g
Dimensions	L110mm, W110mm, H110mm	L150mm, W200mm, H150mm
Material	Plastic & Stainless Steel	Plastic & Stainless Steel
WRc Approved	Yes	No
Min - Max Pipe Size	98mm - 107mm Internal Diameter	136mm - 152.5mm Internal Diameter
Box Qty	84	20
Pallet Qty	504	120

IMPORTANT INFORMATION:

- **Install only into drain inlet, NOT outlet** (installing into outlet can cause blockage)

Wear appropriate PPE when accessing drains

Inspect valve every 6–12 months and clean as needed

METEX®

Metex Ltd, Celtic House, Gaerwen Industrial Estate, Anglesey, LL60 6HR, UK