CONTROL JOINTS

TECHNICAL SPECIFICATIONS

Easy & cost-effective vertical control joint & crack inducer for laying liquid screeds.

BENEFITS

- **Can be securely positioned over UFH pipes with no need to notch**
- **Dedicated clips allow millimetre perfect positioning**
- **Quick & simple installation with no adhesive backing or tape needed**
- **Can be configured to work at 40mm or 45mm material depths by simply rotating the strip**
- **Ideal for use with free-flowing, self-levelling liquid screeds such as Breedonflow Screed, Isocrete, Gyvlon, Supaflo and many more**

HOW IT WORKS

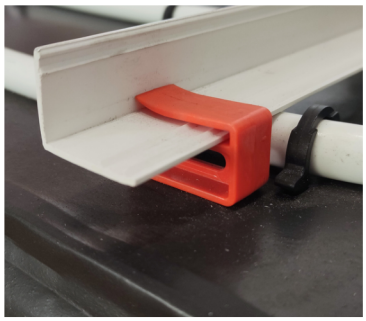

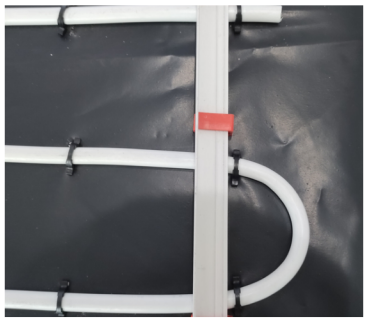

TECHNICAL DATA

SKU	JNT004	JNT005
Weight	262g each	262g each
Dimensions	40/45mm x 1.9m each	40/45mm x 1.9m each
Material	Plastic	Plastic
Suitable for use over UFH pipes?	Yes	Yes
Applications	Liquid Screed	Liquid Screed
Pack Qty	10	20
Pallet Qty	50 packs	25 packs

IMPORTANT INFORMATION:

- Always use gloves, safety glasses, boots, and protective clothing when working with wet screed. Wet screed is caustic and can cause severe skin and eye burns.

Wear appropriate PPE & avoid skin contact with wet screed

Store flat or upright in a secure area