SCREED LEVELLERS

TECHNICAL SPECIFICATIONS

Lightweight and cost-effective levellers for liquid screed, lighter and more compact than traditional metal tripods.

BENEFITS

- **Available as standard universal screed leveller as well as pointed version for installing into insulation**
- **Quick to adjust**
- **Reusable and easy to clean**
- **Flat design and stable base allow easy placement**

HOW IT WORKS

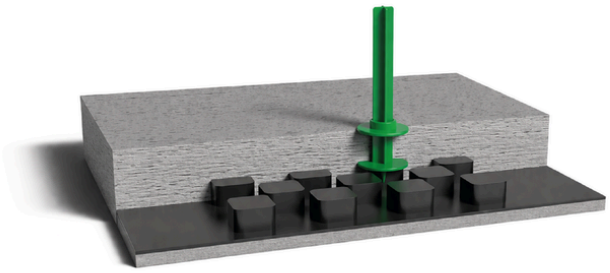

Insert the pointed end of the insulation leveller into the insulation for underfloor heating. Mark the desired height using a laser level. Adjust the leveller ring to the datum point.

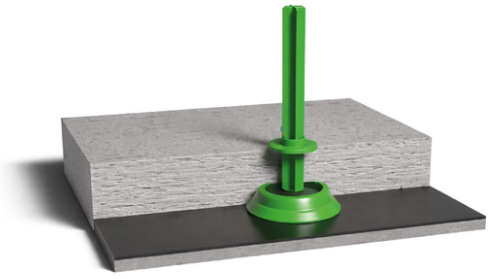

Place the product on the surface to be leveled (recommended spacing 2 metres.) Mark the desired height using a laser level. Adjust the leveller ring to the datum point.

TECHNICAL DATA

SKU	SPD007	SPD008
Weight	255g each	21g each
Dimensions	D87mm, H157mm each	D50mm, H176mm each
Material	Plastic & BZP Steel	Plastic
Corrosion resistant?	No	Yes
Applications	Liquid Screed	Liquid Screed (UFH)
Box Qty	20	50
Pallet Qty	tbc	tbc

IMPORTANT INFORMATION:

- Recommended spacing 2000mm between screed tripods, although this can be adjusted to suit.
- Always set the level directly to each disc.

Clean each leveller immediately after use to prevent screed hardening

Wear appropriate PPE & avoid skin contact with wet screed